

# 2011 CATALOG

## AMATEUR RADIO EQUIPMENT





## ALL MODE TRANSCEIVERS



60 m Band  
U.S. version

HF/50 MHz Transceiver • Rubber and Light Blue Display Options

**FT DX 9000D** 200 W VRF for both Main and Sub Receiver, Full Dual Receive Capability

• Large TFT Display and the Data Management Unit Built-In • Three  $\mu$ -Tuning Modules for 160–20 m bands Built-In • Internal Switching Regulator Power Supply

**FT DX 9000MP** 400 W Special Order Version VRF for both Main and Sub Receiver, Full Dual Receive Capability

• Two Pairs of Analog Meters, plus LCD Window • Data Management Unit Built-In • External Switching Regulator Power Supply and Speaker with Audio Filters (TPS-9000H) Included

**FT DX 9000Contest** 200 W Custom-Configurable Version

• Two Pairs of Analog Meters, plus LCD Window • VRF (Variable RF Filter) Preselector for 160–6 m bands Built-In • Internal Switching Regulator Power Supply



60 m Band  
U.S. version

HF/50 MHz 200 W Transceiver

**FT DX 5000MP**  $\pm 0.25$  ppm CXCQ, 100 Hz Roofing Filter and Station Monitor SM-5000 included

**FT DX 5000D**  $\pm 0.5$  ppm TCXO and Station Monitor SM-5000 included (100 Hz Roofing Filter optional)

**FT DX 5000**  $\pm 0.5$  ppm TCXO included (Station Monitor SM-5000, 100 Hz Roofing Filter optional)

Newly designed 9 MHz 1st IF in the main receiver • Improved 3rd Order Dynamic Range, and Superb IP3:  $-112$  dB,  $+40$  dBm at 10 kHz separation, and 105 dB,  $+35$  dBm at the most practical 2 kHz separation • Newly designed sharp 6-pole Crystal Roofing Filters • 4 selectable EQ positions • Double Quad Double Balanced Mixer • VRF (Variable RF Filter) Preselector with up to 62 steps • Totally Independent Receivers • IF WIDTH / F SHIF • CONTOUR • Manual Notch and Beat-reducing Automatic Digital Notch Filter (DNF) • Improved Digital Noise Reduction (DNR) • Clear CL Displays furnish essential general information



60 m Band  
U.S. version

HF/50 MHz Transceiver

**FT-2000 Series** ■ **FT-2000D** 200 W Version with External Power Supply ■ **FT-2000** 100 W Version with Internal Power Supply

• Both 100 Watt (internal power supply) and 200 Watt (external power supply) versions available • Dual Receive (in-band) Featuring F Stage • Receiver Front End Includes VRF (Variable RF Filter) Preselector • External High-Q  $\mu$ -Tuning for 160–20 m Amateur bands (optional  $\mu$ -Tuning Kits for 160/80–40/30–20 m bands required) • 3/5/15 kHz First F Roofing Filters installed • Strong receiver design provides wide dynamic range and high intercept point • Wide array of IF-DSP interference-rejection filters • Dual Receive Function • External display port for viewing of RF Scope, Audio Scope and Oscilloscope displays (Optional Data Management Unit, DMU-2000 and aftermarket monitor are required)



60 m Band  
U.S. version

HF/50 MHz 100 W Transceiver

**FT-950**

• Eight narrow Band-Pass Filters in the RF stage eliminate out of band interference and protect the 1st IF • 1st IF 3 kHz Roofing Filter • Original YAESU F DSP provides comfortable and effective reception • IF SHIFT / IF WIDTH / CONTOUR / NOTCH / DNR • DSP Parametric Microphone Equalizer and Speech Processor enhance the SSB/AM transmission signal quality • Built-in high stability TCXO ( $\pm 0.5$  ppm after 1 min,  $\pm 77^\circ\text{F}/25^\circ\text{C}$ ) • Built-in Automatic Antenna Tuner • Five Voice Message Memories with the optional SMS-6 unit • Large Multi-color VFD (Vacuum Fluorescent Display) • Optional Data Management Unit (DMU-2000) permits display of various operating conditions, transceiver status and station logging • Optional RF  $\mu$ -Tune Units for 160 m, 80/40 m and 30/20 m bands



HF/50 MHz 100 W All Mode Transceiver

**FT-450D** Built-in Automatic Antenna Tuner

• Large Informative Front Panel Display • Key Illumination • Foot Stand • 300 Hz/500 Hz/2.4 kHz CW IF Filters • The F DSP provides quiet and enjoyable high performance HF/50 MHz operation • CONTOUR Control Operation • Manual NOTCH • Digital Noise Reduction (DNR) • IF WIDTH • Digital Microphone Equalizer • F SHIFT Control • Rugged Aluminum Die-cast chassis with large cooling fan • Internal or External Antenna Tuning System capability



HF/50 MHz All-Mode Portable Base Transceiver

**FT-897D**

• High-stability TCXO • Optional Internal Batteries: 4400 mAh x 2 (Power Output: 20 W) • Built-in 3-Message Memory Keyer • IF SHIFT • IF Noise Blanker • Spectrum Scope • 200 Memory channels • Alpha-Numeric Labeling for Memories • Multi-Color Dot-Matrix Display • Compatible with ATAS-120A Auto-Tune Antenna • ARTS™ • Smart Search™ • CW Training Feature • Optional Collins® Mechanical Filters • Optional FP-30 Power Supply can be installed in the radio • Optional FC-30 Automatic Antenna Tuner



Ultra-Compact HF/VHF/UHF All-Mode Transceiver

**FT-857D**

• Ultra Compact and Ergonomic Design • Optional YSK-857 Separation Kit • 32-color LCD Display • Optional 10-pole Collins® Mechanical SSB Filter and 500 or 300 Hz CW Filter • Compatible with ATAS-120A Auto-Tune Antenna • Digital Signal Processing Unit included • Built-in 3-Message Memory Keyer • 200 Memory channels • Alpha-Numeric Labeling of Memories • ARTS™ • Smart Search™ • Spectrum Scope • CW Training Feature • Optional FC-30 Automatic Antenna Tuner



5 W All-Mode HF/VHF/UHF Portable Transceiver

**FT-817ND**

• Ultra Compact 5.3" W x 1.5" H x 6.5" D (135 mm W x 38 mm H x 165 mm D) • Multimode Design: SSB, CW, AM, FM, FM-Wide (RX), Packet and Digital • Power Output: 5 W (selectable 0.5/1.6/2.5/5 W) • Wide choice of power sources: 9A-28 Battery Tray (for 8 AA batteries) and FNB-85 Ni-MH Battery Pack included • External DC Cable also included for 13.8 V operation • Two Antenna Ports: BNC on front panel and Type "T" (SO-239) on rear panel • Built-in CW Electronic Keyer • 208 Memory Channels • Triple-Color LCD • Spectrum Scope • Optional 10-pole Collins® Mechanical SSB Filter and 500 or 300 Hz CW Filter

## LINEAR AMPLIFIERS



**QUADRA** 1 kW HF/50 MHz Linear Amplifier Power Supply

**VL-1000/VP-1000**

• Frequency range: 160–6 m bands (160–15 and 6 m bands in USA) • 1 kW Power Output (6 m/1 kW) • Two input and four output jacks • Built-in Automatic Antenna Tuner • Matching VP-1000 Power Supply provides 48 V DC at 48 A



1.5 kW HF/50 MHz Linear Amplifier (50 MHz/1 kW) / Power Supply

**VL-2000/VP-2000**


• Frequency range: 160–6 m bands (160–15 and 6 m bands in USA) • 1.5 kW Power Output (6 m/1 kW) • Two input and four output jacks (plus an additional ANTENNA DIRECT jack) • Built-in ultra high speed Automatic Antenna Tuner • Matching VP-2000 Power Supply provides 48 V DC at 63 A



## Accessories & Options

### ALL MODE Transceivers

#### FTex 9000 System Customization Diagrams

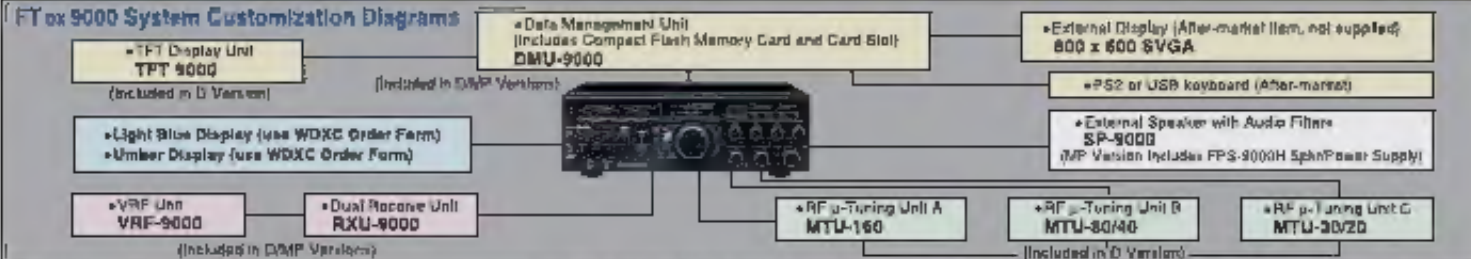

MODEL		FTex 9000 Series	FTex 5000 Series	FT-2000 Series	FT-950	FT-450b	FT-897b	FT-457b	FT-817ND
<b>MICROPHONES/SPEAKERS</b>									
MD-200aw	Desk-Top Dynamic Microphone	•	•	•	•	•	•	•	•
MD-100aw	Desk-Top Microphone	•	•	•	•	•	•	•	•
MH-21aw	Hand Microphone					(included)	(included)	(included)	(included)
MH-21as	Hand Microphone	•	(included)	(included)	(included)				
MH-25aw	DTMF Hand Microphone					•	•	•	•
MH-58aw	Remote Control DTMF Hand Microphone					•	•	•	•
SP-9000	External Speaker w/Audio Filters	•							
SP-2000	External Speaker w/Audio Filters		•	•					
SP-2	External Speaker w/Audio Filters						•		
MLS-100	High-Power External Speaker					•	•	•	•
YH-77STA	Open - Air Stereo Headphones	•	•	•	•	•	•	•	•
<b>FILTERS</b>									
MTU-160	$\mu$ -Tuning Unit (160 m Band)	• (DMP/Contest)							
MTU-80/40	$\mu$ -Tuning Unit (80/40 m Band)	• (DMP/Contest)							
MTU-30/20	$\mu$ -Tuning Unit (30/20 m Band)	• (DMP/Contest)							
$\mu$ -Tuning Kit A	$\mu$ -Tuning Kit (160 m Band) including MTU-160		•	•	•				
$\mu$ -Tuning Kit B	$\mu$ -Tuning Kit (80/40 m Band) including MTU-80/40		•	•	•				
$\mu$ -Tuning Kit C	$\mu$ -Tuning Kit (30/20 m Band) including MTU-30/20		•	•	•				
XF-126CN	Roofing Filter (300 Hz)		• (1000/Contest)						
YF-122B	Collins® SSB Filter (2.3 kHz/4.7 kHz; -6 dB/-60 dB)						•	•	• <sup>1</sup>
YF-122C	Collins® CW Filter (500 Hz/2 kHz; -6 dB/-60 dB)				(Req. RX) • <sup>2</sup>		•	•	• <sup>2</sup>
YF-122CN	Collins® CW Filter (300 Hz/1 kHz; -6 dB/-60 dB)				(Req. RX) • <sup>2</sup>		•	•	• <sup>2</sup>
<b>TCXO</b>									
TCXD-9	Temperature Compensated XTAL Osc. $\pm 0.5$ ppm							•	•
<b>ANTENNAS/TUNERS</b>									
ATAS-120A	High Speed Active -Tuning Antenna System					•	•	•	
ATBK-100	VHF/UHF Antenna Base Kit for ATAS-100, ATAS-120A					•	•	•	
ATAS-25	Manually-Tuned Portable Antenna					•	•	•	•
FC-30	External Automatic Antenna Tuner						•	•	
FC-40	External Automatic Antenna Tuner (for Wire antenna)				•	•	•	•	
<b>OTHERS</b>									
DVS-6	Voice Memory Unit				•				
SM-5000	Station Monitor		• (5000)						
ADMS-4AU	Windows™ PC Programming Software (USB)								•
ADMS-4BU	Windows™ PC Programming Software (USB)						•	•	
YL-2000VP-2000	1.5kW 15V 10A 50 Wb Linear Amplifier (includes YF-2000 Power Supply)	•	•	•	•	•	•	•	
YL-1000VP-1000	1kW 15V 10A 50 Wb Linear Amplifier (includes YF-1000 Power Supply)	•	•	•	•	•	•	•	
CT-39A	Packet Cable					•	•	•	•
CT-68	Band Data Cable						•	•	
CT-82	CAT Interface Cable						•	•	•
CT-118	Band Data Cable					•			
T9207451	Linear Connection Cable				•	•			
CSC-83	Soft Case								•
DMU-2000	Data Management Unit		•	•	•				
RY-2	Remote Control Keypad	(included)	(included)	•	•				
FNB-85	NI-MH Battery Pack (9.6 V, 1400 mAh)								(included)
FNB-78	NI-MH Battery Pack (12.2 V, 4500 mAh)						•		
NC-86B/G/U <sup>1</sup>	NI-MH Battery Charger for FNB-85								(included)
PA-26B/G/U <sup>1</sup>	Charger for FNB-78 (requires CD-24)						•		
CD-24	NI-MH Battery Charger for FNB-78						•		
FP-1030A	25 Amp Power Supply				•	•	•	•	•
FP-1023	23 Amp Compact Power Supply (U.S.A. only)				•	•	•	•	•
FP-20	Docking AC Power Supply					•			
YSK-857	Separation Kit							•	
MMB-90	Mobile Bracket					•			
SRIG-1	Side Carry Handle					•			

<sup>1</sup> "B" for 120 WAC, "C" for 220-240 WAC and "U" for 220-240 WAC w/UK plug. <sup>2</sup> One of two filters (CW 600 Hz or 160 Hz) can be included. <sup>3</sup> One of three filters (SSB 2.3 kHz, CW 600 Hz or 160 Hz) can be included.

#### MISCELLANEOUS

- YA-00/FG Mobile Fiberglass HF Whip Antenna  
(7-54 MHz-150W PEP, Replaces FC-40)
- YA-30 Double Broadband HF Antenna  
(1.8-30 MHz-150 W PEP.)

**ATAS-25**  
Manually-Tuned  
Portable Antenna  
with MICRO  
For FT-97ND/97D



**ATAS-120A**  
High Speed Active-Tuning  
Antenna System for Mobile  
PowerGain™  
For FT-450D/FT-897D/887D



**ATBK-100**  
VHF/UHF Antenna Base/  
Counterpoise Kit for  
ATAS-120A

**FC-40**  
Automatic-Matching  
200-Memory  
Antenna Tuner  
For Long Wire  
For FT-950/FT-450b/FT-897D/887D





DUAL BAND  
DUAL RECEIVE

50 W 2 m/70 cm Dual Band FM Mobile (1.25 m band available for the USA version)



## FTM-350AR / FTM-350AE

• Large (5.2" x 1.6"/130 x 40 mm) dot matrix (264 x 64 dots) LCD display for comfortable viewing both night and day. Choose your favorite LCD display from 8 vibrant color options • Multi-purpose Global Positioning System Display (with optional FOPS-1 GPS Receiver and Antenna or optional FOPS-2 External GPS Receiver and Antenna) • Huge memory with 1038 channels • Dual Band AF Monitor for listening to HA/AM broadcast while monitoring the Amateur bands • The Display Control Head is designed for easy separation from the main RF unit • Tough aluminum die-cast chassis • 10 (U.S.) m remote control cable included (optional 20 ft/6 m control cable) • Compatible with the worldwide standard data-communications system, APRS\* and SmartReasoning™ capabilities • 3-Speaker System (including Built-In Dual Speakers in the rear of the Control Head for FM Broadcast in Stereo) • Built-in Barometric Pressure Sensor • One-touch Vacuum Cup Mounting Bracket with adjustable viewing angle (AMB-98 supplied)

QUAD BAND  
DUAL RECEIVE

50 W 10 m/2 m/70 cm Quad Band FM Mobile

## FT-8900R / FT-8900E

• V-U/V+VU-U Dual Band Reception • V-U Full Duplex Operation • Cross-Band Repeater Operation • Remote-Head Mounting Capability • High-Power 50 W (430 MHz/35 W) • CTCSS and DCS Encode / Decode Built-In • ARTS™ (Auto-Range Transponder System) • Smart Search™ (Automatic Memory Loading System) • Hyper Memory • Ample 300 Memory Channel Capacity • RF Squelch • Internet Key for Instant Access to WRES-II™ • 1200/9600 bps Packet Operation

DUAL BAND  
DUAL RECEIVE

50 W 2m/70 cm Dual Band FM Mobile

## FT-8800R / FT-8800E

• V-(UV-VU)-U Dual Band Reception • V-U Full Duplex Operation • Cross-Band Repeater Operation • Remote-Head Mounting Capability • High-Power 50 W (430 MHz/35 W) • User-Programmable Keys on the Microphone • CTCSS and DCS Encode / Decode Built-In • ARTS™ (Auto-Range Transponder System) • Smart Search™ (Automatic Memory Loading System) • Hyper Memory • Huge Memory with 1000+ Channels • RF Squelch • Internet Key for Instant Access to WRES-II™ • 1200/9600 bps Packet Operation

DUAL BAND



50 W 2m/70 cm Dual Band FM Mobile

## FT-7900R / FT-7900E

• One-Touch Hyper Memories Feature • High-Power 50 W (435 MHz/45 W) • Wide Frequency Coverage: TX: 144-146/(146) MHz and 430-440/(450) MHz; RX: 108-520 MHz, 700-999/990 MHz (USA; Cellular Blocked) • Remote Front Panel Design (Optional YSK-7800 Required) • The LCD display indicates the operating frequency, the status of functions, and the alpha-numeric memory labels • 1000 Memory Channels with 20 Memory Groups • Built-in CTCSS and DCS Encode / Decode • 16 DTMF™ Memories can store 16 digits • Versatile Scanning Functions: VFO Scan, Memory Channel Scan, Programmable Memory Scan and Priority Scan • Smart Search™ • 1200 or 9600 bps Packet Operation • Internet Key for Instant Access to WRES-II™ • ARTS™ (Auto-Range Transponder System) • Automatic Repeater Shift (ARS) • Automatic Power Off (APO) • Time-Out Timer (TOT) • Radio to Radio Cloning

DUAL BAND

IP57  
Survivable to  
3 dm/10 ft in  
water (1 meter  
depth)

2 m/70 cm Dual Band FM Mobile (2 m 50 W / 70 cm 40 W)



## FTM-10R / FTM-10E

• High-Power TX output 50 W (430 MHz/40 W) • Waterproof at 3 feet/1 m for 30 minutes, and protection against dust (Front panel meets IP57 standard) • Illuminated Keys with high brightness LEDs • Bright ocean blue negative type LCD display • Compact size: FTM-10R/E: 4.48" W x 1.50" H x 7.12" D (112 mm W x 37.6 mm H x 178 mm D) • PTT button is on the Detachable Front Panel • Complete hands free operation when using the optional wireless Bluetooth™ • High power 8-watt audio amplifier and a PA function with optional MLS-200-M10 • 500 Memory Channels with 8-digit alphanumeric tags • Built-in AM/FM (stereo) broadcast receiver • AF Dual receiving between AM/FM radio and Amateur bands • Message function compatible with VX-3R/E, VX-8DR/E, VX-8DR/G/E and FTM-10R/E • ARTS™ • Smart Search™ • Built-in VOX Function • Wireless Cloning function



75 W 2 m Heavy-Duty FM Mobile

## FT-2900R / FT-2900E

• 75 Watts Power Output • Die-cast Chassis with Aluminum Heat-sink (not requiring a fan) • 200 Regular Memory Channels • Alpha-numeric Channels Display • CTCSS and DCS Encode/Decode Built-In • Versatile Scanning Capability • WX Channels with "Severe Weather" Alert (USA version only) • Smart Search™ • Internet Key for Instant Access to WRES-II™ • Wide/Narrow Deviation Selection • RF Squelch • Interactive Programming Menu • Supplied Voltage Indication • Time-Out Timer (TOT) • Automatic Power-Off (APO) • Automatic Repeater Shift (ARS) • 4-Level Display Dimmer • Dual Watch



45 W 2 m Ultra Rugged FM Mobile

## FT-1900R / FT-1900E

• 200 Regular Memory Channels with Alpha-numeric tags (maximum 6 characters) • Eight Memory Banks for Channel allocation • 55 Watts RF Power Output • Loud Audio, 3 W with the Internal Speaker • CTCSS (50 tones) and DCS (104 codes) Encode / Decode, with split tone and DCS Encode-only capability • RF Squelch • Automatic Repeater Shift (ARS) • Separate Transmit Frequency Memories (1000 Splits) • Tone Search Scanning • EPDS (Enhanced Paging & Code Squelch) Operation • CTCSS/DCS/PCS Bell Operation • DCS Code Inversion • Split Tone Operation • DTMF Auto dialer (10 channel) Operation • DC Voltage Indication • Memory-Only Mode • Password function • Versatile Scanning Function: Preferential Memory Scan, Programmable memory scan, VFO Scan, Priority Channel Scanning (Dual Watch), Memory Bank Link Scan and Weather Alert Scan (USA version only) • Internet Key for Instant Access to WRES-II™ • Programming Key Assignments (4 keys) • WX channels with "Severe Weather" Alert (USA version only) • ARTS™ (Auto-Range Transponder System) • CW Training • Smart Search™ • Time-Out Timer (TOT) • Automatic Power-Off (APO) • Busy Channel Lock-Out (BCLO) • Adjustable TX Deviation Level • Cloning



55 W 70 cm Ultra Rugged FM Mobile

## FT-1907R (Asia Market only)

WRES-II™ is a comprehensive and easy-to-use system for linking repeaters and/or home stations together, using Internet voice technology. Now you can talk to old friends, or make new ones, around the world... using your hand-held or mobile radio via a WRES-equipped node to talk to other Hams across the country or across an ocean.

Amateur Radio Internet Linking Kit HRI-100  
Requires DC12 V or Optional NC-72B/G/U,  
PA-48C/U  
<http://www.westd.com/en/wiresinfo-en/>



## Accessories & Options

Mobile Transceivers		FTM-350AR/AE	FT-1900R/E	FT-8400R/E	FT-7900R/E	FTM-10R/E	FT-2900R/E	FT-1907H	FT-1900R/E
<b>MICROPHONES/SPEAKERS</b>									
MH-42AUS	Hand Microphone with 1750 Hz Burst Button (supplied w/European and Asian versions)		●	■	●		●	●	■
MH-42CAJ	Normal Microphone	■							
MH-48NJA	DTMF Microphone (Supplied in USA version)	Included	■	Included	Included		Included	Included	Included
MH-66A/J	Waterproof DTMF Microphone					■			
MH-66A/J	Waterproof Microphone					■			
BH-1A	Waterproof Bluetooth® Headset (Stereo Type)	●				●			
BH-2A	Waterproof Bluetooth® Headset (Monaural Type)	●				●			
FEP-4	Earpiece Earphone for BH-1A	●				●			
MLS-200-M10	High-Power External Speaker	●				●			
MLS-100	High-Power External Speaker		■	■	■		●	●	■
<b>BRACKET</b>									
MMB-50	Quick Release Mobile Mounting Bracket		■	■	■				
MMB-35	Mobile Mounting Bracket							●	●
MMB-M11	Handheld Panel Bracket					●			
MMB-M10	Mobile Panel Bracket (stand type)					●			
<b>CABLES</b>									
YSK-2900	Separation Kit		●	●					
YSK-7800	Separation Kit				●				
CT-19A	Packet Interface Cable		●	●	●				
CT-M10	Separate Cable 20 ft/6 m					●			
CT-M11	External Handset Connection Cable					■			
CT-133	GPS Extension Cable (for FGPS-2)	●							
COX-2NM	Antenna Cable					●			
<b>OTHERS</b>									
ADMS-2H	Windows™ PC Programming Kit		■						
ADMS-2J	Windows™ PC Programming Kit			■					
ADMS-250	Windows™ PC Programming Kit	●							
ADMS-1900	Windows™ PC Programming Kit							●	■
ADMS-2800	Windows™ PC Programming Kit						●		
ADMS-7900	Windows™ PC Programming Kit				●				
MEK-2	Mic Extension Kit (For use with Tapered 8-pin Microphones)		●	●	●				
MEK-M10	Mic Jack					■			
FP-1030A	AC Power Supply (2.5 A)	●	●	●	●	●	●	●	●
FP-1033	AC Power Supply (2.1 A) USA Only	●	●	●	●	●	●	●	●
FGPS-2	External GPS Antenna Unit (requires CT-13A and CT-133)	●							
CT-136	External GPS adapter for FGPS-2	●							
FPR-1	Monitor Unit	●							
FGPS-1	Internal GPS Receiver/Antenna Unit	●							
BU-1	Bluetooth® Unit	●				●			
CAR-1	Charger Sleeve for BH-1A, BH-2A AND FPR-1	●				●			
FVS-2	Voice Guide Unit	●							
YHA-M10	VHF/UHF Mobile Antenna					●			
AMK-1	Antenna Mounting Bracket for License Plate					●			

## ROTATORS



Extra Heavy-duty  
G-2800DX Series



Heavy-duty  
G-1000DX Series  
Medium-duty  
G-800DX Series



Heavy-duty  
G-1000 Series  
Medium-duty  
G-800SA



Light/Medium-duty  
G-650 Series  
(Euro and Asia Market only)  
G-450 Series



Azimuth-Elevation  
Rotator combination  
G-5500



Elevation only  
G-550

	117V	220V	220V(CE)		117V	220V	220V(CE)
G-2800DXA	■	■		G-800SA	■	●	
G-2800DXC			■	G-450A		●	
G-1000DXA	●	●		G-450C			●
G-1000DXC			●	G-450A	●	●	
G-1000A		●		G-450C			●
G-1000C			●	G-5500	●	●	
G-800DXA	■	■		G-550	■	●	

On models with "DXA/DXC" suffix, rotation speed and torque will vary with the speed control setting.

### Accessories for Rotators

GC-038	Mount Clamp for G-1000DXA/DXC, G-800DXA, G-800SA, and G-450A/C Rotators
GC-048	Mount Clamp for G-2800DXA/DXC Rotators
GS-050	50 mm Thrust Bearing (Mount Diameter 1 1/4 - 2 inch)
GS-065	65 mm Thrust Bearing (Mount Diameter 1 1/2 - 2 1/2 inch)
GS-080U	Universal Bearing
GA-3000	Absorber Joint for G-2800DXA/DXC Rotators
GA-2500	Absorber Joint for G-1000DXA/DXC, G-800DXA, G-800SA, and G-450A/C Rotators
GS-232B	Computer Controller for all DXA/DXC Series and G-5500 Rotators
C-1080	Control Cable for GS-232A (using DX Series Rotators)
GL-32	Mount Adjustment Plate





5 W Ultra-Rugged, Submersible  
6 m/2 m 70 cm Tri-Band FM Handheld



### VX-8DR / VX-8DE

6 m/2 m 70 cm (222 MHz U.S. version) Tri-band FM Handheld  
Heavy Duty: IPX7 (3 ft/1 m for 30 minutes) Waterproof Rating  
Bluetooth® for hands-free operation with optional accessories  
Huge Memory with 1830 channels  
Built-in Barometric Pressure and Temperature sensor  
Internal Bar Antenna for better AM broadcast band reception  
Wideband Receive capability (A Band): 500 kHz-999.990 MHz

•Ultra-Rugged Polycarbonate Resin Front Panel with Aluminum die-cast chassis •1.0 W operation capability with 3 AA batteries (requires optional FBA-39) •Real Dual Band Operation (V-V / U+U / V+U) •The large LCD display provides clear and easy-to-read information •Four independent durable key buttons on the side, in addition to the front numeric keypad •Independent A and B Band Keys with TX/Busy Indicator •Dual band AF Dual monitor function •CW Training feature •Emergency Automatic ID system, Emergency Strobe/Bleep, and Busy strobe LED functions •Message feature (compatible with VX-3R/E, VX-8DR/DE, VX-8GR/GE, FTM-10SR/SE and FTM-10SR/SE) •Built-in CTCSS and DCS Encode/Decode •WIRELESS™ Internet Linking capability •Battery saver •Auto-range Transponding System (ARTS™)



•The optional CT-138 is available to connect the FGPS-2 GPS Antenna to the microphone connector



•The optional GPS Antenna Unit FGPS-2 can be connected to the optional Speaker/Microphone MH-74A7A



5 W Ultra-Rugged, Built-in GPS receiver  
2 m/70 cm Dual-Band FM Handheld

### VX-8GR / VX-8GE

2 m/70 cm Dual-band FM Handheld  
Built-in GPS Antenna (Optional GPS antenna is not required)  
External Data Jack for other data communications  
Fully Ruggedized and Water Resistant (IPX5) design  
Huge Memory with 1327 channels  
Wideband Receive capability (A Band): 108 MHz-999.990 MHz

•Ultra-Rugged Polycarbonate Resin Front Panel with Aluminum die-cast chassis •1.0 W operation capability with 3 AA batteries (requires optional FBA-39) •Real Dual Band Operation (V-V / U+U / V+U) •Large, clear and easy-to-read LCD display •Four independent durable buttons on the side, in addition to the front numeric keypad •Independent A and B Band Keys with TX/Busy indication •Vibrate Alert Function when a message is received •CW Training feature •Emergency Automatic ID system, Emergency Strobe/Bleep and Busy strobe LED functions •Message feature (compatible with VX-3R/E, FTM-10R/E and FTM-10SR/SE) •Built-in CTCSS and DCS Encode/Decode •WIRELESS™ Internet Linking capability •Battery saver •Auto-range Transponding System (ARTS™)



•Built-in GPS unit/antenna (The photo is for illustration only)



•Vibrate Alert Function (The Vibrate Pattern is selectable from three styles)

### Supports APRS\* communication with the Built-in Worldwide Standard AX.25 Data TNC

The VX-8 series radios are compatible with the worldwide standard APRS\* (Automatic Packet Reporting System) using the GPS system to locate and exchange position information.

•SmartBeaconing™ Function  
•Memories to list 50 stations  
•Memories to store 30 APRS\* messages  
•DIGI-PATH routing indication function  
•8 DIGI-PATH routing settings

•GPS Compass Display - "Heading Up" or "North Up"  
•APRS\* Symbol Icon pre-set function  
•Clear display of the APRS\* Beacon Messages  
•LED flashing when receiving the Selective Message

APRS\* is a registered trademark of Bob Brinkley/VB4APR, SmartBeacon™ from Ham-Hi-D Networks



5 W Ultra-Rugged, Submersible  
6 m/2 m 70 cm Tri-Band FM Handheld

### VX-7R / VX-7RB (Black)

•5 W TX Power on 50/144/430 MHz, 1.5 W on 222 MHz (U.S. version) •True Dual Receiver: V-V/U-U/V+U+U+HAM •Weather Broadcast Memory Bank with "Severe Weather" Alert •Over 800 Memory Channels •Shortwave and Marine Memory Banks •10 "Ingot" Memories •Rugged Magnesium Case •1300 mAh Lithium-Ion Battery Supplied •CTCSS and DCS Encode/Decode •Dot Matrix Display •24 Hour Clock with On/Off Timers •Spectrum Scope Display •RX and TX Battery Savers •Emergency Strobe/Bleep Feature



5 W Heavy Duty Submersible  
2 m/70 cm Dual Band FM Handheld

### VX-6R / VX-6E

•5W TX Power on 144/430 MHz, 1.5 W on 222 MHz (U.S. version) •Wide Receiver Coverage: 0.5-998.99 MHz (cellular blocked) •Over 1000 Memories with Labeling and 24 Memory Groups •One-Touch Direct Memory Recall •EAL (Emergency Automatic ID) for Search and Rescue work •Enhanced Paging and Code Squelch •1300 mAh Lithium-Ion Battery Supplied •Security Password when turning on the radio •Split CTCSS/DCS Tone Capability •CW Training Feature



5 W Heavy Duty  
2 m/70 cm Dual Band FM Handheld

### FT-60R / FT-60E

•AM Aircraft Receiver •ML-STD 810 Rating •Wide RX frequency range •High Speed Scanning •1400 mAh Ni-MH Battery supplied •Emergency Automatic ID (EAL) •Dual-CTCSS Enhanced Paging •NOAA Weather Bank with Alert Scan (USA version) •Over 1000 Memory Channels with 10 Banks •Split CTCSS/DCS and DCS Encode-only modes available •Two programmable keys at the front panel •Mono-band and Memory-only modes capability



1.5 W Ultra Compact  
2 m/70 cm Dual Band FM Handheld

### VX-3R / VX-3E

•Ultra compact size 1.9"W x 3.2"H x 0.9"D (47 mm W x 81 mm H x 23 mm D) with FNB-82L and antenna •1.5 W Output with internal battery (70 cm 1 W) •3 W Output with External DC (70cm = 2 W) •Long-life 1100 mAh Lithium-Ion Battery Included •3 x "AA" Alkaline Dry Cell battery operation (optional FBA-37 Battery Case required) •Wide-band Receive with Internal Bar Antenna for AM broadcast band •Stereo Earphone Jack for FM Stereo Broadcast •Sub RX operation between AM/FM radio and Amateur band •Special Memory Banks for Marine, Shortwave, and NOAA WX channels (USA version) •CTCSS and DCS Encode/Decode with Tone Search and "Split" tone modes •WIRELESS™ Internet Access Key •New mechanical Dial Lock function •Aluminum Die-Cast Chassis •Emergency feature included •CW training feature •Message function compatible with VX-8DR/DE, VX-8GR/GE, FTM-10R/E and FTM-10SR/SE



5 W Full Featured  
2 m Compact FM Handheld

### FT-250R / FT-250E

•208 Memory Channels with Alpha-numeric tags (maximum 7 characters) •Direct Keypad Frequency Entry •High Power Output: 5 Watts (FNB-83) •Load Audio: 700 mW with the Internal Speaker •Long life FNB-83 (7.2 W/1400 mAh) and Desktop Charger Included •CTCSS and DCS Encode/Decode with split Tone and DCS Encode-only capability •Versatile Scanning Function: VFO / Memory / PMS / Dual Watch •Nine DTMF Auto-dialer memories •Keypad/Dial Lockout Capability •Two front panel programmable keys •TX and RX Battery Saver functions •Convenient Access key for WIRELESS™ Internet Access key •RF squelch (only passes signals exceeding the programmed level) •Memory-only operating mode available •Rugged and Water Resistant case construction •Smart Search™ Operation •Battery Voltage Display •Adjustable TX Deviation Level (±5 kHz or ±2.5 kHz) •Transmit Time-Out-Timer (TTO) and Automatic Power-Off (APO) •Busy Channel Lock-Out (BCLO) •Automatic Repeater Shift (ARS) •ARTS™ (Auto-range Transponding System)



5 W Submersible Full Featured  
2 m Compact FM Handheld

### FT-270R / FT-270E

•200 Memory Channels with Alpha-numeric tags (maximum 6 characters) •Ten Memory banks for channel allocation •High Power Output: 5 Watts (FNB-83 or FBA-25A with AA batteries) •Load Audio: 800 mW with the Internal Speaker •Long life FNB-83 (7.2 W/1400 mAh) and Overnight Charger included •Paging and Code Squelch (FPCS) •Password function •CTCSS and DCS Encode/Decode •Versatile Scanning Functions: VFO / Memory / PMS / Dual Watch •Nine DTMF Auto-dialer memories •Keypad / Dual Lockout capability •WIRELESS™ Internet Access key •RF squelch •Memory-only mode •Rugged case construction (IPX7, 3 ft/1 m 30 minutes) •Large LCD Display •Smart Search™ •Battery Voltage Indication •Adjustable TX Deviation Level (±5 kHz or ±2.5 kHz) •Time-Out Timer (TTO) and Automatic Power-Off (APO) •Busy Channel Lock-Out (BCLO) •Automatic Repeater Shift (ARS) •ARTS™

5 W Submersible Full Featured  
70 cm Compact FM Handheld

### FT-277R



## Accessories & Options

Handheld Transceivers		VX-4DR/E	VX-4GR/E	VX-7R/RB	VX-6R/E	VX-3R/E	FT-40R/E	FT-27R FT-270R/E	FT-250R/E
<b>PROGRAMMING KIT</b>									
ADMS	Windows PC Programming Kit	ADMS-VX	ADMS-VXG	ADMS-7R	ADMS-6R	ADMS-VX	ADMS-4	ADMS-27R/270	ADMS-25R
<b>SOFT CASE</b>									
CSC	Soft Vinyl Case	CSC-93	CSC-95	CSC-6R	CSC-91	CSC-92			
<b>MICROPHONE/HEADSET</b>									
MH-34B4B	Compact Speaker / Microphone		•			•	•		•
MH-37A4B	Compact Lapel Mic with Earpiece		•			•	•		•
MH-97A4B	Compact Speaker / Microphone			•	•			•	
MH-71A4B	Waterproof Speaker / Microphone			•	•			•	
MH-74A7A	Waterproof Speaker / Microphone	•							
VC-24	Lightweight VOX (Voice-Operated) Headset				•			•	
VC-25	Lightweight VOX (Voice-Operated) Headset		•			•	•		•
VC-27	Earpiece / Microphone			•	•			•	
<b>Bluetooth® OPTIONS</b>									
BH-1A	Bluetooth® Handset with stereo earphone jack	•							
BH-2A	Bluetooth® Handset	•							
BU-1	Bluetooth® Adapter Unit	•							
FEF-4	Earphone (Stereo) for BH-1A Bluetooth® Handset	•							
<b>GPS OPTIONS</b>									
FGPS-2	GPS Antenna Unit	•							
CT-136	GPS Antenna Adapter for FGPS-2	•							
<b>CABLES &amp; ADAPTERS</b>									
E-DC-21	DC Cable with Voltage Regulator and Cigarette-Lighter Plug					•			
E-DC-50	DC Cable with Cigarette-Lighter Plug	•	•	•	•		•	•	•
E-DC-6	DC Cable (Plug and Wire Only)	•	•	•	•		•	•	•
CM-3	Adapter for use with BNC Connector	•	•	•	•	•	•	•	•
CT-27	Radio to Radio Cloning Cable					•	•		
CT-61	Microphone Adapter			•	•			•	
CT-44	For packet interface or use with earlier Yaesu MID		•			•	•		•
CT-144	Cloning Cable (2.5 a-2.5 a)		•						
CT-143	Data Cable (2.5 a-Data 9 PIN)		•						
CT-134	Cloning Cable	•							
CT-131	Microphone Adapter	•							
<b>BATTERY PACK &amp; BATTERY TRAY</b>									
FBA-23	2 x AA Alkaline Cells Battery Tray			•	•				
FBA-25A	6 x AA Size Alkaline Cells Battery Tray						•	•	•
FBA-37	3 x AA Alkaline Cells Battery Tray					•			
FBA-39	3 x AA Size Alkaline Cells Battery Tray	•	•						
FNB-83	Ni-MH Battery Pack (7.2 V, 1400 mAh)						(Included)	(Included)	(Included)
FNB-80LI	Lithium-Ion Battery Pack (7.4 V, 1400 mAh)			(Included)	(Included)				
FNB-82LI	Lithium-Ion Battery Pack (3.7 V, 1100 mAh)					(Included)			
FNB-101LI	Lithium-Ion Battery Pack (7.4 V, 1000 mAh)	(Included)	(Included)						
FNB-102LI	High Capacity Lithium-Ion Battery Pack (7.4 V, 1800 mAh)	•	•						
<b>BATTERY CHARGERS</b>									
CD-15A	Rapid Charger (2.5 hours)			•	•				
CD-26	Charger Cradle							•	
CD-40	Charger Cradle (3 hours) for BH-1A/BH-2A Bluetooth® Handset	•							
CD-41	Rapid Charger (2.5 hours)	•	•						
CD-47	Desktop Rapid Charger (4 hours) Requires PA-43B/C/U <sup>1</sup>							•	(Included)
VAC-370B/C <sup>1</sup>	Rapid Charger (1.5 hours)						•		
NC-72B/C/U <sup>1</sup>	Wall Charger (for FNB-84)			•	•				
NC-45B/C/U <sup>1</sup>	Wall Charger (for FNB-82LI, CD-40 Cradle)	•				•			
NC-46B/C/U <sup>1</sup>	Battery Charger (5 hrs/FNB-101LI, 6 hrs/FNB-102LI)	•	•						
NC-44B/C/U <sup>1</sup>	Wall Charger (for FNB-83)							•	
PA-43B/C/U <sup>1</sup> (CE)	AC Adapter (CE) for CD-47							•	•
PA-44C/U <sup>1</sup> (CE)	AC Adapter (CE)	•	•				•	•	
PA-46C/U <sup>1</sup> (CE)	AC Adapter (CE)					•			
PA-48C/U <sup>1</sup> (CE)	AC Adapter (CE)			•	•				
<b>OTHERS</b>									
SU-1	Barometric Pressure Sensor			•	•				
FTD-7	DTMF Paging Unit							•	

<sup>1</sup> "B" for 100 VAC, "C" for 220-240 VAC, "S" for 220 VAC, "U" for 220-240 VAC w/100V plug.

## RECEIVERS



Wideband Receiver

**VR-160**

- Wideband Coverage  
0.1-1299.990 MHz  
AM/FM/WFM  
(Euro and Asia Market only)



Wideband Receiver

**VR-120D**

- Wideband Coverage  
0.1-1299.990 MHz  
AM/FM/WFM  
(Euro and Asia Market only)

## Accessories for Receivers

MODEL		VR-160	VR-120D
ADMS-5	Advanced Data Management System	•	
CSC-92	Soft Case	•	
CSC-75	Soft Case		•
FNB-82LI	3.7 V, 1100 mAh Rechargeable Lithium-Ion Battery	•	
FNB-79MH	2.4 V, 1200 mAh Rechargeable Ni-MH Battery		•
FBA-37	Dry Cell Battery Case for 3 x "AA" Alkaline Cells	•	
NC-62	Charger Stand with CA-34		•
CA-34	Charger Sleeve with NC-32		•
PA-46C/U <sup>1</sup>	AC Adapter (CE)	•	•
PA-30C/U <sup>1</sup>	AC Adapter	•	•
CT-35	Cloning Cable		•
CM-2	BNC-to-SMA Adapter	•	
E-DC-16	DC Cable with Cigarette-Lighter Plug		•
E-DC-21	DC Cable with Cigarette-Lighter Plug	•	



# Specifications

E for European Version

Model	Receive Frequency Range	Transmit Frequency Range	Modes	TX Power Output	Sensitivity	Dimensions in Inches (in mm) W x H x D	Weight
FT dx 9600MP	30 MHz-50 MHz	144-146 MHz Amateur Bands	USB, LSB, CW, RTTY, PACKET, AM, FM	400 W (AM: 100 W) Adjustable Class A (SSB): 100 W (WPAK)	SBB/CW 0.2 $\mu$ V (8 m 0.125 $\mu$ V) AM 0.2 $\mu$ V (8 m 1 $\mu$ V) FM 0.5 $\mu$ V (8 m 0.35 $\mu$ V)	20.4 x 5.5 x 17.3 (518 x 140 x 438.5)	64 lbs 29 kg Int. Ext. Power Supply 170-00000
FT dx 9600D	30 MHz-50 MHz	144-146 MHz Amateur Bands	USB, LSB, CW, RTTY, PACKET, AM, FM	200 W (AM: 50 W) Adjustable Class A (SSB): 75 W (WPAK)	SBB/CW 0.2 $\mu$ V (8 m 0.125 $\mu$ V) AM 0.2 $\mu$ V (8 m 1 $\mu$ V) FM 0.5 $\mu$ V (8 m 0.35 $\mu$ V)	20.4 x 5.5 x 17.3 (518 x 140 x 438.5)	44 lbs 20 kg
FT dx 3600 Contest	30 MHz-50 MHz	144-146 MHz Amateur Bands	USB, LSB, CW, RTTY, PACKET, AM, FM	300 W (AM: 50 W) Adjustable Class A (SSB): 75 W (WPAK)	SBB/CW 0.2 $\mu$ V (8 m 0.125 $\mu$ V) AM 0.2 $\mu$ V (8 m 1 $\mu$ V) FM 0.5 $\mu$ V (8 m 0.35 $\mu$ V)	20.4 x 5.5 x 17.3 (518 x 140 x 438.5)	53 lbs 24 kg
FT dx 5000MP w/5M-5000	30 MHz-50 MHz	144-146 MHz Amateur Bands	USB, LSB, CW, RTTY, PACKET, AM, FM	200 W (AM: 50 W) Adjustable Class A (SSB): 75 W (WPAK)	SBB/CW 0.2 $\mu$ V (8 m 0.125 $\mu$ V) AM 0.2 $\mu$ V (8 m 1 $\mu$ V) FM 0.5 $\mu$ V (8 m 0.35 $\mu$ V)	18.4 x 5.5 x 15.6 (466 x 140 x 396.2)	42.7 lbs 19.4 kg BALANCE 18.4 x 5.5 x 15.6 (466 x 140 x 396.2)
FT dx 5000D w/5M-5000	30 MHz-50 MHz	144-146 MHz Amateur Bands	USB, LSB, CW, RTTY, PACKET, AM, FM	200 W (AM: 50 W) Adjustable Class A (SSB): 75 W (WPAK)	SBB/CW 0.2 $\mu$ V (8 m 0.125 $\mu$ V) AM 0.2 $\mu$ V (8 m 1 $\mu$ V) FM 0.5 $\mu$ V (8 m 0.35 $\mu$ V)	18.4 x 5.5 x 15.6 (466 x 140 x 396.2)	42.7 lbs 19.4 kg BALANCE 18.4 x 5.5 x 15.6 (466 x 140 x 396.2)
FT dx 5000	30 MHz-50 MHz	144-146 MHz Amateur Bands	USB, LSB, CW, RTTY, PACKET, AM, FM	200 W (AM: 50 W) Adjustable Class A (SSB): 75 W (WPAK)	SBB/CW 0.2 $\mu$ V (8 m 0.125 $\mu$ V) AM 0.2 $\mu$ V (8 m 1 $\mu$ V) FM 0.5 $\mu$ V (8 m 0.35 $\mu$ V)	18.4 x 5.5 x 15.6 (466 x 140 x 396.2)	42.7 lbs 19.4 kg BALANCE 18.4 x 5.5 x 15.6 (466 x 140 x 396.2)
FT-3600D 200 W Version	30 MHz-50 MHz	144-146 MHz Amateur Bands	USB, LSB, CW, RTTY, PACKET, AM, FM	200 W (AM: 50 W) Adjustable Class A (SSB): 75 W (WPAK)	SBB/CW 0.2 $\mu$ V (8 m 0.125 $\mu$ V) AM 0.2 $\mu$ V (8 m 1 $\mu$ V) FM 0.5 $\mu$ V (8 m 0.35 $\mu$ V)	18.4 x 5.5 x 15.6 (466 x 140 x 396.2)	42.7 lbs 19.4 kg BALANCE 18.4 x 5.5 x 15.6 (466 x 140 x 396.2)
FT-2000 100 W Version	30 MHz-50 MHz	144-146 MHz Amateur Bands	USB, LSB, CW, RTTY, PACKET, AM, FM	100 W (AM: 25 W) Adjustable	SBB/CW 0.2 $\mu$ V (8 m 0.125 $\mu$ V) AM 0.2 $\mu$ V (8 m 1 $\mu$ V) FM 0.5 $\mu$ V (8 m 0.35 $\mu$ V)	18.4 x 5.5 x 15.6 (466 x 140 x 396.2)	33 lbs 15 kg
FT-950	30 MHz-50 MHz	144-146 MHz Amateur Bands	USB, LSB, CW, RTTY, PACKET, AM, FM	100 W (AM: 25 W) Adjustable	SBB/CW 0.2 $\mu$ V (8 m 0.125 $\mu$ V) AM 0.2 $\mu$ V (8 m 1 $\mu$ V) FM 0.5 $\mu$ V (8 m 0.35 $\mu$ V)	18.4 x 5.5 x 15.6 (466 x 140 x 396.2)	21.4 lbs 9.8 kg
FT-450D	30 MHz-50 MHz	144-146 MHz Amateur Bands	USB, LSB, CW, RTTY, PACKET, AM, FM	100 W (AM: 25 W) Adjustable	SBB/CW 0.2 $\mu$ V (8 m 0.125 $\mu$ V) AM 0.2 $\mu$ V (8 m 1 $\mu$ V) FM 0.5 $\mu$ V (8 m 0.35 $\mu$ V)	18.4 x 5.5 x 15.6 (466 x 140 x 396.2)	8.8 lbs 4.0 kg
FT-897D	0.1-56 MHz 2 m 70 cm 170-174 MHz 420-470 MHz	144-146 MHz 2 m 70 cm Amateur Bands	USB, LSB, CW, AM FM, FM-W, PKT, AFSK	500 W (100 W) (25 W AM) 50 W (10 W) (12.5 W AM) 25 W (70 cm) (5 W AM) 70 W (420-470 MHz)	SBB/CW 0.2 $\mu$ V (8 m 0.125 $\mu$ V) AM 0.2 $\mu$ V (8 m 1 $\mu$ V) FM 0.5 $\mu$ V (8 m 0.35 $\mu$ V)	18.4 x 5.5 x 15.6 (466 x 140 x 396.2)	8.8 lbs 4.0 kg
FT-857D	0.1-56 MHz 2 m 70 cm 170-174 MHz 420-470 MHz	144-146 MHz 2 m 70 cm Amateur Bands	USB, LSB, CW, AM FM, FM-W, PKT, AFSK	100 W (100 W) (25 W AM) 50 W (10 W) (12.5 W AM) 25 W (70 cm) (5 W AM)	SBB/CW 0.2 $\mu$ V (8 m 0.125 $\mu$ V) AM 0.2 $\mu$ V (8 m 1 $\mu$ V) FM 0.5 $\mu$ V (8 m 0.35 $\mu$ V)	18.4 x 5.5 x 15.6 (466 x 140 x 396.2)	8.8 lbs 4.0 kg
FT-817ND	0.1-56 MHz 2 m 70 cm 170-174 MHz 420-470 MHz	144-146 MHz 2 m 70 cm Amateur Bands	USB, LSB, CW, AM FM, FM-W, PKT, AFSK	5 W (AM: 1.5 W) (1.5 W)	SBB/CW 0.2 $\mu$ V (8 m 0.125 $\mu$ V) AM 0.2 $\mu$ V (8 m 1 $\mu$ V) FM 0.5 $\mu$ V (8 m 0.35 $\mu$ V)	18.4 x 5.5 x 15.6 (466 x 140 x 396.2)	2.6 lbs 1.2 kg On/Off Antenna
FTM-3500H/AE	0.5 - 1.8 MHz 76 - 200 MHz 200 - 999.99 MHz	2 m 70 cm Amateur Bands	FM, PKT 1200/1600 AM (RX)	500/200 W	0.2 $\mu$ V (12 dB SINAD)	5.8 x 1.8 x 6.0 (140 x 46 x 156)	4.6 lbs 2.1 kg
FT-8900R/E	0.5 - 1.8 MHz 76 - 200 MHz 200 - 999.99 MHz	2 m 70 cm Amateur Bands	FM, PKT 1200/1600 AM (RX)	500/200 W	0.2 $\mu$ V (12 dB SINAD)	5.8 x 1.8 x 6.0 (140 x 46 x 156)	2.2 lbs 1 kg
FT-8600R/E	0.5 - 1.8 MHz 76 - 200 MHz 200 - 999.99 MHz	2 m 70 cm Amateur Bands	FM, PKT 1200/1600 AM (RX)	500/200 W	0.2 $\mu$ V (12 dB SINAD)	5.8 x 1.8 x 6.0 (140 x 46 x 156)	2.2 lbs 1 kg
FT-7900R/E	0.5 - 1.8 MHz 76 - 200 MHz 200 - 999.99 MHz	2 m 70 cm Amateur Bands	FM, PKT 1200/1600 AM (RX)	500/200 W	0.2 $\mu$ V (12 dB SINAD)	5.8 x 1.8 x 6.0 (140 x 46 x 156)	2.2 lbs 1 kg
FTM-100R/E	0.5 - 1.8 MHz 76 - 200 MHz 200 - 999.99 MHz	2 m 70 cm Amateur Bands	FM, PKT 1200/1600 AM (RX)	500/200 W	0.2 $\mu$ V (12 dB SINAD)	5.8 x 1.8 x 6.0 (140 x 46 x 156)	2.2 lbs 1 kg
FT-1900R/E	0.5 - 1.8 MHz 76 - 200 MHz 200 - 999.99 MHz	2 m 70 cm Amateur Bands	FM, PKT 1200/1600 AM (RX)	500/200 W	0.2 $\mu$ V (12 dB SINAD)	5.8 x 1.8 x 6.0 (140 x 46 x 156)	2.2 lbs 1 kg
FT-1907R	0.5 - 1.8 MHz 76 - 200 MHz 200 - 999.99 MHz	2 m 70 cm Amateur Bands	FM, PKT 1200/1600 AM (RX)	500/200 W	0.2 $\mu$ V (12 dB SINAD)	5.8 x 1.8 x 6.0 (140 x 46 x 156)	2.2 lbs 1 kg
FT-2500R/E	0.5 - 1.8 MHz 76 - 200 MHz 200 - 999.99 MHz	2 m 70 cm Amateur Bands	FM, PKT 1200/1600 AM (RX)	500/200 W	0.2 $\mu$ V (12 dB SINAD)	5.8 x 1.8 x 6.0 (140 x 46 x 156)	2.2 lbs 1 kg
VX-8DR/E	0.5 - 999.99 MHz	2 m 70 cm Amateur Bands	FM, AM (TX 50 MHz)	5 W (1.5 W AM 1 W)	0.1 $\mu$ V (12 dB SINAD) 0.1 $\mu$ V (12 dB SINAD)	5.8 x 1.8 x 6.0 (140 x 46 x 156)	2.2 lbs 1 kg
VX-8GR/E	0.5 - 999.99 MHz	2 m 70 cm Amateur Bands	FM, AM (TX 50 MHz)	5 W (1.5 W AM 1 W)	0.1 $\mu$ V (12 dB SINAD) 0.1 $\mu$ V (12 dB SINAD)	5.8 x 1.8 x 6.0 (140 x 46 x 156)	2.2 lbs 1 kg
VX-7R/VX-7RB	0.5 - 999.99 MHz	2 m 70 cm Amateur Bands	FM, AM (TX 50 MHz)	5 W (1.5 W AM 1 W)	0.1 $\mu$ V (12 dB SINAD) 0.1 $\mu$ V (12 dB SINAD)	5.8 x 1.8 x 6.0 (140 x 46 x 156)	2.2 lbs 1 kg
VX-6R/E	0.5 - 999.99 MHz	2 m 70 cm Amateur Bands	FM, AM (TX 50 MHz)	5 W (1.5 W AM 1 W)	0.1 $\mu$ V (12 dB SINAD) 0.1 $\mu$ V (12 dB SINAD)	5.8 x 1.8 x 6.0 (140 x 46 x 156)	2.2 lbs 1 kg
FT-60R/E	0.5 - 999.99 MHz	2 m 70 cm Amateur Bands	FM, AM (TX 50 MHz)	5 W (1.5 W AM 1 W)	0.1 $\mu$ V (12 dB SINAD) 0.1 $\mu$ V (12 dB SINAD)	5.8 x 1.8 x 6.0 (140 x 46 x 156)	2.2 lbs 1 kg
VX-3R/E	0.5 - 999.99 MHz	2 m 70 cm Amateur Bands	FM, AM (TX 50 MHz)	5 W (1.5 W AM 1 W)	0.1 $\mu$ V (12 dB SINAD) 0.1 $\mu$ V (12 dB SINAD)	5.8 x 1.8 x 6.0 (140 x 46 x 156)	2.2 lbs 1 kg
FT-270R/E	0.5 - 999.99 MHz	2 m 70 cm Amateur Bands	FM, AM (TX 50 MHz)	5 W (1.5 W AM 1 W)	0.1 $\mu$ V (12 dB SINAD) 0.1 $\mu$ V (12 dB SINAD)	5.8 x 1.8 x 6.0 (140 x 46 x 156)	2.2 lbs 1 kg
FT-277R	0.5 - 999.99 MHz	2 m 70 cm Amateur Bands	FM, AM (TX 50 MHz)	5 W (1.5 W AM 1 W)	0.1 $\mu$ V (12 dB SINAD) 0.1 $\mu$ V (12 dB SINAD)	5.8 x 1.8 x 6.0 (140 x 46 x 156)	2.2 lbs 1 kg
FT-250R/E	0.5 - 999.99 MHz	2 m 70 cm Amateur Bands	FM, AM (TX 50 MHz)	5 W (1.5 W AM 1 W)	0.1 $\mu$ V (12 dB SINAD) 0.1 $\mu$ V (12 dB SINAD)	5.8 x 1.8 x 6.0 (140 x 46 x 156)	2.2 lbs 1 kg

\* Cellular Blocked per FCC rule Part 15.127, may not receive 450 MHz Amateur band (USA Version).

- Bluetooth® is a registered trademark of Bluetooth Special Interest Group (SIG), Inc. Vertex Standard Co., Ltd. is an Active Member of Bluetooth SIG.

- APRS® is registered trademark of Bob Brinkley W0AIFR, "Smart Beacons"™ from Ham Radio

Specifications are subject to change without notice, and are guaranteed within the amateur bands only. Frequency ranges will vary according to transmitter version, check with your dealer.

About this brochure: We have made this brochure as comprehensive and factual as possible. We reserve the right to make changes at any time in equipment, optional accessories, specifications, model numbers, and availability. Please check with your Authorized Yaesu Dealer for complete details.

**YAESU**  
Amateur Radio Division of Vertex Standard

**VERTEX STANDARD CO., LTD.** <http://www.vsc.co.jp>  
4-3-8 Nakameguro, Meguro-ku, Tokyo 153-8644, Japan

**VERTEX STANDARD USA** <http://www.vertexstandard.com>  
US Headquarters 10900 Walker Street, Cypress, CA 90630, U.S.A.

**YAESU UK LTD.** <http://www.yaesu.co.uk>  
Unit 12, Sun Valley Business Park, Winnall Close  
Winchester, Hampshire, SO23 0LB, U.K.

**VERTEX STANDARD HK LTD.** <http://www.vsc.hk>  
Unit 1206-1208, 13/F., Millennium City 2, 378 Kwun Tong Road,  
Kwun Tong, Kowloon, Hong Kong

**VERTEX STANDARD AUSTRALIA PTY., LTD.**  
10 Waseley Court BURWOOD EAST VIC 3151, Australia <http://www.vscid.com.au>

